

Forklifts • Order Pickers • Pallet Movers • Stackers • Reach Trucks

PRODUCT RANGE


SAFETY

TCM
Trusted Partner


EFFICIENCY


COMFORT



TCM
Always Evolving



SAFETY

INTEGRAL TO OUR TRUCKS

STANDARDISING SAFETY ON OUR TRUCKS LEADS TO SAFER WORKING ENVIRONMENTS WITH LESS ACCIDENTS.

- Stability support systems built in as standard.
- Safety is not just a feature, it's integral to our design ethos.
- Our flexible control systems allow you to optimise the safety features for your applications.
- Inbuilt security functions to prevent unauthorised operation.
- Engineered for 360 degree visibility.



EFFICIENCY

INDUSTRY LEADING PERFORMANCE

CREATING EFFICIENCIES UTILISING NEW TECHNOLOGIES.

- Low fuel and power consumption.
- Maximising performance to reduce operational cycle times.
- Easy servicing and maintenance, minimising your downtime.
- Eco-modes to save energy.
- High efficiency low maintenance Lithium battery options

Li-ION



Lithium-ion batteries can offer real advantages over lead-acid batteries, particularly in high energy, multi-shift, and 24/7 applications. When it comes to Total Cost of Ownership (TCO), TCM can advise you on the most cost-effective energy solution you will need to meet all your operational requirements.



COMFORT

CONSIDERING THE OPERATOR TO INCREASE YOUR PRODUCTIVITY

FEATURES DESIGNED TO MINIMISE YOUR TOTAL COST OF OPERATION.

- Utilising the science behind ergonomics to create a truck that works with the operator.
- Intuitive controls for easy operation.
- We understand working environments to enable.
- Operator areas with functionality and easy access in mind.



Electric Counter Balance Forklift Trucks

FTB 1.4-2.0

3 WHEEL 48 VOLT COUNTERBALANCE TRUCK

LIFT CAPACITY 1400/1600/1800/2000 kg

LIFT HEIGHT Up to 7 metres



FB 1.6-2.0

4 WHEEL 48 VOLT COUNTERBALANCE TRUCK

LIFT CAPACITY 1600/1800/2000 kg

LIFT HEIGHT Up to 7 metres



FHB 2.5-3.5

4 WHEEL 80 VOLT COUNTERBALANCE TRUCK

LIFT CAPACITY

2500/3000/3500 kg

LIFT HEIGHT

Up to 7 metres



FHB 4.0-5.5

4 WHEEL 80 VOLT COUNTERBALANCE TRUCK

LIFT CAPACITY

4000/4500/5000/5500 kg

LIFT HEIGHT

Up to 7 metres



Diesel/LPG Counter Balance Forklift Trucks

FD/FGE 1.5-3.5

ENGINE COUNTERBALANCE TRUCK

DIESEL LIFT CAPACITY 2000/2500/3000/3500 kg

LPG LIFT CAPACITY 1500/1750/2000/2500/3000/3500 kg

Diesel/LPG

LIFT HEIGHT

Up to 7 metres



FD/FGE 4.0-5.5

ENGINE COUNTERBALANCE TRUCK

DIESEL/LPG LIFT CAPACITY 4000/4500/5000/5500 kg

Diesel/LPG

LIFT HEIGHT

Up to 7 metres



FD 6.0-10.0

ENGINE COUNTERBALANCE TRUCK

LIFT CAPACITY 6000/7000/8000/10000 kg

Diesel only

LIFT HEIGHTS

Up to 8 metres



Pallet Trucks

PAL-F/E

COMPACT PEDESTRIAN PALLET TRUCK

LIFT CAPACITY
1600/1800/2000 kg
LIFT HEIGHT 0.735 metres



PAL-R

COMPACT PEDESTRIAN PALLET TRUCK WITH RIDE-ON FOLDABLE PLATFORM

LIFT CAPACITY 2000 kg
LIFT HEIGHT 0.735 metres



PTF

PEDESTRIAN PALLET TRUCK WITH RIDER PLATFORM

LIFT CAPACITY
2000/2500 kg



PTP/S/R

PEDESTRIAN PALLET TRUCK WITH PROTECTED PLATFORM. SIDE OR REAR ENTRY

LIFT CAPACITY
2000/2500 kg



LLR

STAND-IN PALLET TRUCK

LIFT CAPACITY
2000/3000 kg



LLS

SIT-ON PALLET TRUCK

LIFT CAPACITY
2000/3000 kg



Reach Trucks

RTL/RTN

NARROW CHASSIS REACH TRUCK

LIFT CAPACITY
1200/1400 kg
LIFT HEIGHT
Up to 8.95 metres



RTM/RTH/RTX

REACH TRUCK

LIFT CAPACITY
1600/2000/2500 kg
LIFT HEIGHT
Up to 12.1 metres



RTM-TF/RTH-TF

REACH TRUCK WITH TELESCOPIC FORKS

LIFT CAPACITY 2000/2500 kg
LIFT HEIGHT Up to 10.2 metres



RTF

4 - WAY REACH TRUCK

LIFT CAPACITY
2000/2500 kg
LIFT HEIGHT
Up to 9.7 metres



Stackers

SPL

COMPACT PEDESTRIAN STACKER

LIFT CAPACITY 1250 kg

LIFT HEIGHT
Up to 2 metres



SPD

COMPACT PEDESTRIAN STACKER FOR DOUBLE-PALLET HANDLING

LIFT CAPACITY
1250/1600 kg
on the straddles

LIFT HEIGHT
Up to 2 metres



SPW/SPR

COMPACT PEDESTRIAN STACKER WITH OR WITHOUT FOLDABLE PLATFORM

LIFT CAPACITY
1000/1200/1400/1600 kg

LIFT HEIGHT
Up to 5.4 metres



SRS

PEDESTRIAN STACKER WITH RIDER PLATFORM

LIFT CAPACITY
1250/1600 kg

LIFT HEIGHT
Up to 5.4 metres



SRD/R/S

DOUBLE STACKER WITH OR WITHOUT FOLDABLE PLATFORM, SIDE OR REAR ENTRY

LIFT CAPACITY
2000 kg

LIFT HEIGHT
2.1 metres



SRO

STAND-IN STACKER

LIFT CAPACITY
1250/1600/2000 kg

LIFT HEIGHT
Up to 7 metres



SSO

SIT-ON STACKER

LIFT CAPACITY
1600/2000 kg

LIFT HEIGHT
Up to 7 metres



SRT/SST

TELEREACH STACKER STAND-IN AND SIT-ON WITH TELESCOPIC FORKS

LIFT CAPACITY 1000 kg

LIFT HEIGHT
Up to 6.3 metres



Order Pickers

HIGH-LEVEL ORDER PICKER

EOC

LIFT CAPACITY
1000 kg

LIFT HEIGHT
Up to 8.25 metres



EOH

LIFT CAPACITY
1250 kg

LIFT HEIGHT
Up to 10.5 metres



MEDIUM-LEVEL ORDER PICKER

EOM

LIFT CAPACITY 1000 kg

LIFT HEIGHT
Up to 1.8 metres



LOW-LEVEL ORDER PICKER

LO

WITH STANDARD OR RISING PLATFORM WITH OR WITHOUT RISING FORKS

LIFT CAPACITY
1200/2000/2500 kg

LIFT HEIGHT
220/850 mm

PLATFORM HEIGHT
123/1000 mm



Very Narrow Aisle Trucks


RTS

SWIVEL REACH TRUCK

LIFT CAPACITY
1250/1500 kg

LIFT HEIGHT
Up to 10.35 metres



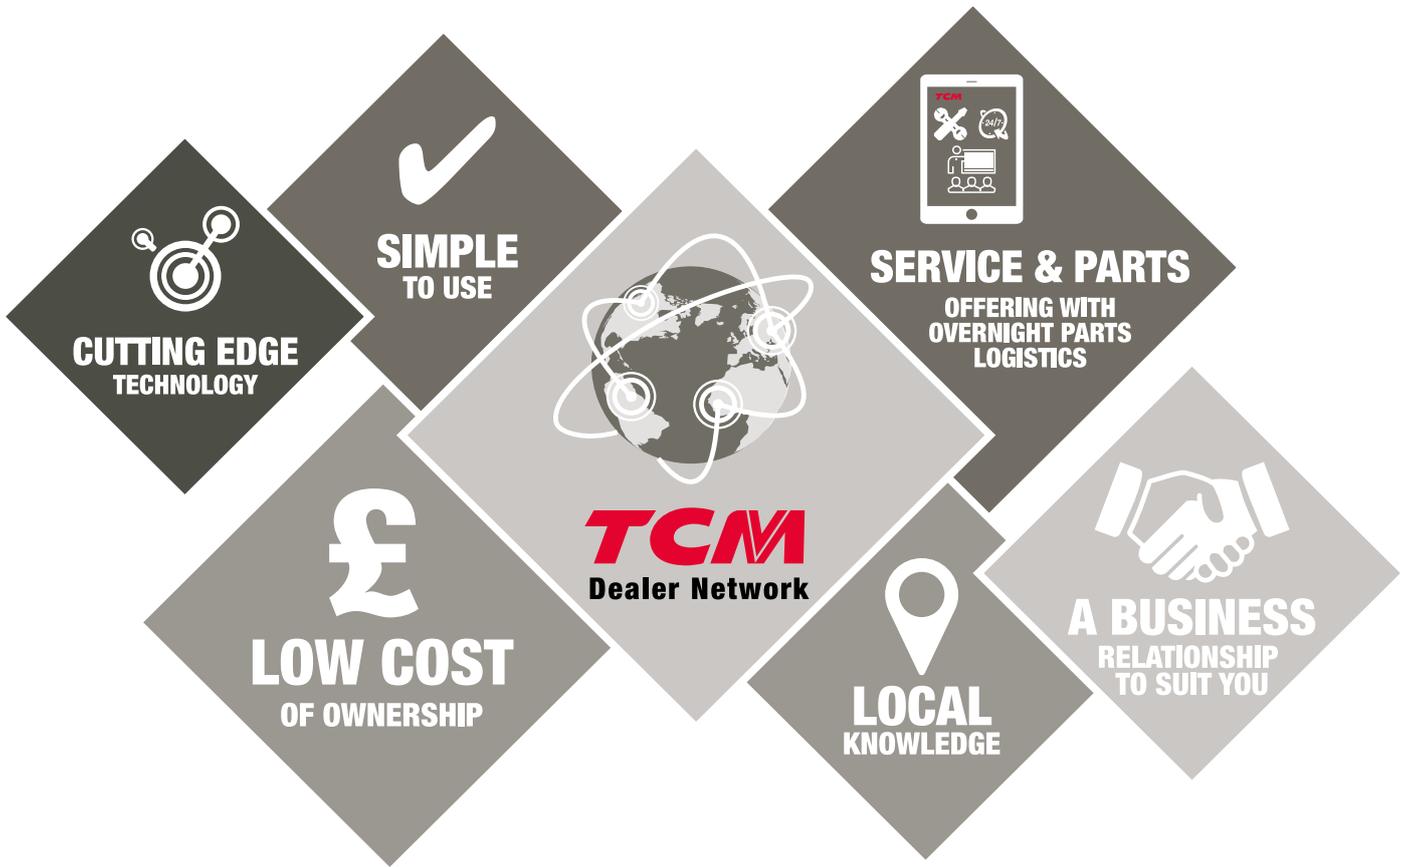

Li-ION

Lithium-ion batteries can offer real advantages over lead-acid batteries, particularly in high energy, multi-shift, and 24/7 applications. When it comes to Total Cost of Ownership (TCO), TCM can advise you on the most cost-effective energy solution you will need to meet all your operational requirements.



LONGER LIFE



HIGHER EFFICIENCY



LONGER RUNTIME



CONSISTENT PERFORMANCE



FASTER CHARGING



NO MAINTENANCE



INBUILT PROTECTION

info@tcm.eu | tcm.eu

TCM
Always Evolving

Mitsubishi Logisnext Europe BV reserves the right to make any changes without notice concerning colours, equipment or specifications detailed in this brochure, or to discontinue individual models. The colours of vehicles delivered may differ slightly from those in this brochure. The specifications vary for different countries depending on local market conditions. Please consult your local dealer to ensure that the vehicle delivered accords with your expectations. All values are determined based on the standard condition and may vary, due to motor and system tolerances, condition of the truck and operational conditions. Some equipment shown on photos are optional. OEBT2172-1122